
Cast-in-Place Moment Slab Traffic Barrier - Flat Grade Installation

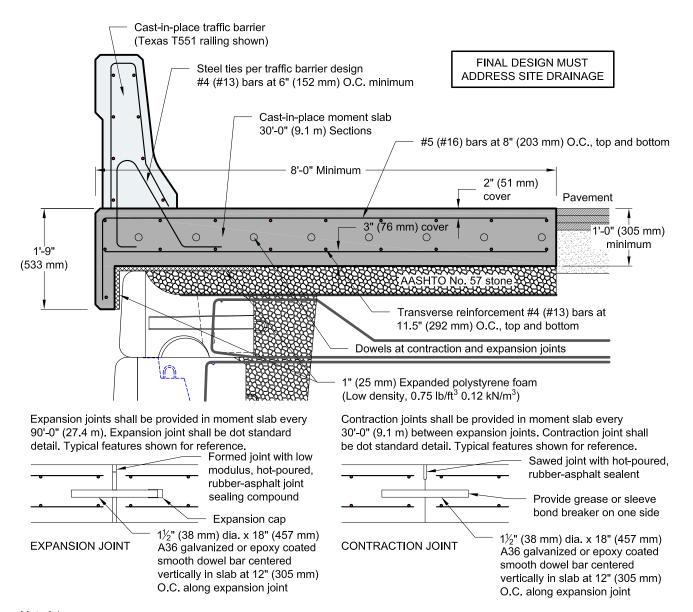

<u>Materials</u>

Concrete for cast-in-place barrier and moment slab shall be dot standard structure mix. Minimum 28 day compressive strength shall be 4,000 psi (27.6 mpa) or higher as specified. Reinforcing steel shall conform to ASTM A706 or AASHTO M31 Grade 60 (420 MPa).

Design

Moment slab shown is dimensioned based on an equivalent static load of 10,000 lbs (44.5 kN) per NCHRP Report 663. Moment slab reinforcement shown is based on <u>AASHTO LRFD Bridge Design Specifications</u>, <u>5th edition</u>, <u>2010</u>, **TL-4** loading detailed in Table A13.2.1.

The selection and use of this detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the registered professional engineer in charge of the project.

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:	JRJ	^{⊣™} Cast-In-Place Moment Slab
APPROVED BY:	JRJ	
DATE:	06-22-2015	Traffic Barrier - Flat Grade
SHEET:	1 of 1	FILE: 9 Cast-In-Place Moment Slab Traffic Barrier - Flat 062215.dwg

