Typical Reinforced Wall Section

Note:
One degree or zero degree batter angle walls are available using blocks with 7 ½" (190 mm) or 6 ¾" (171 mm) knobs (Specialty items)

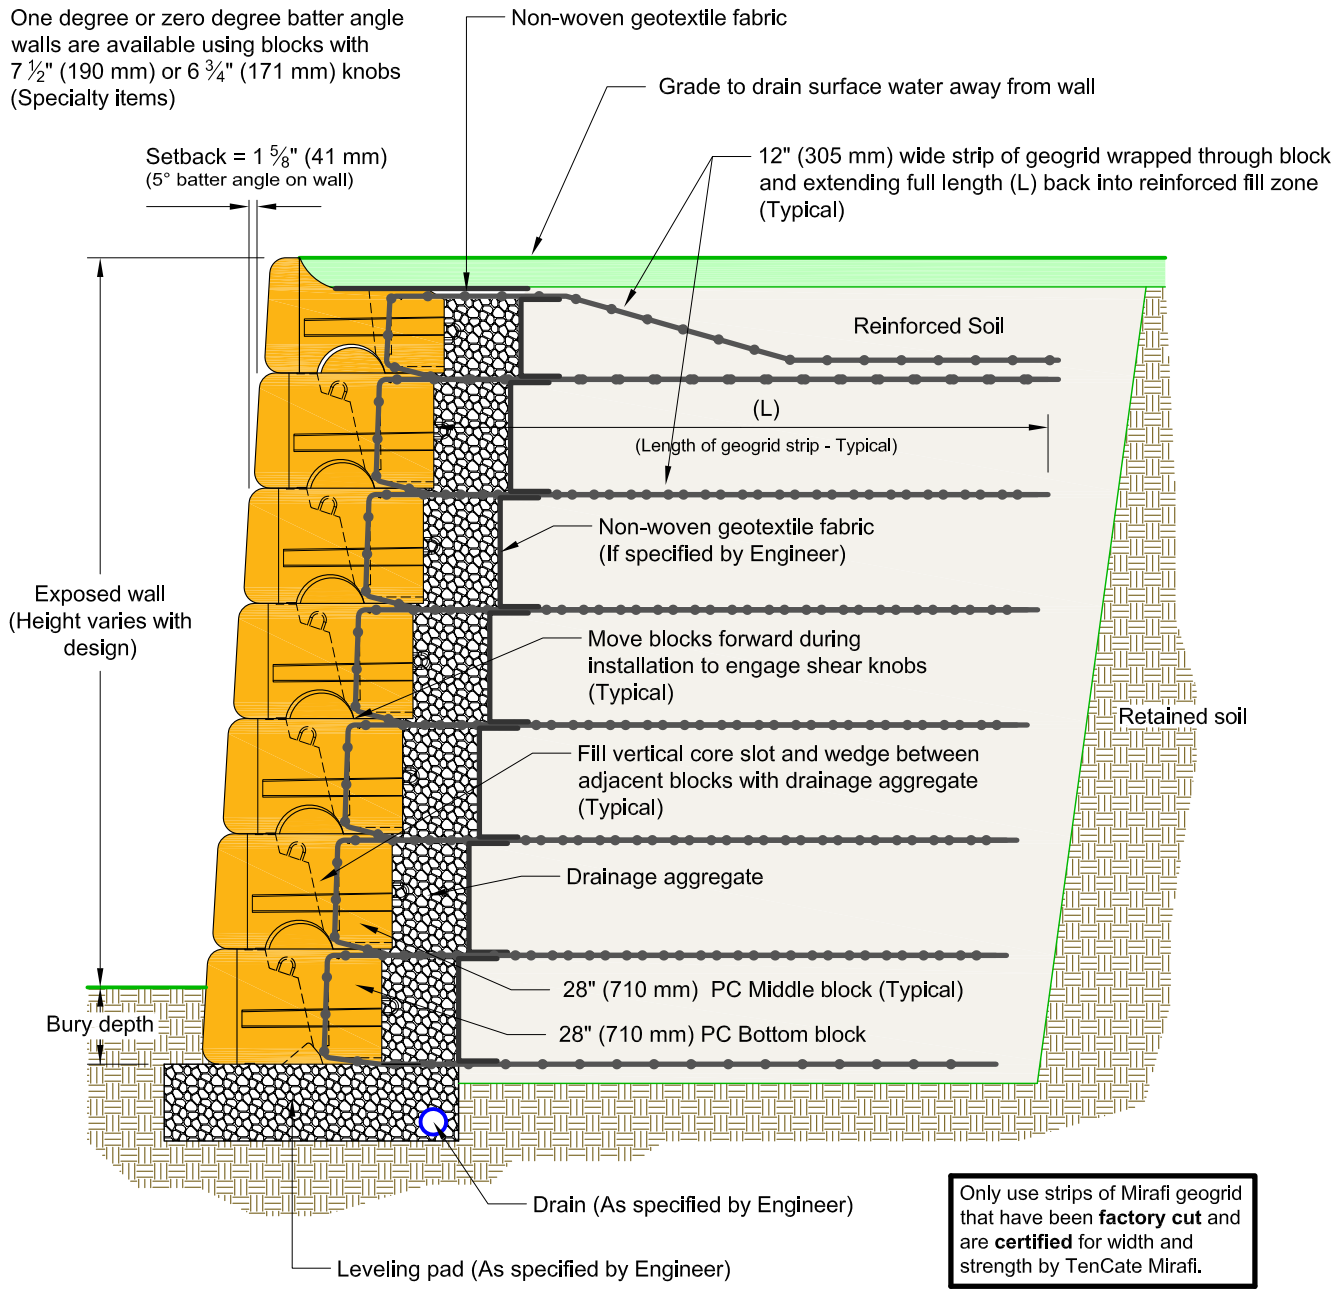

Only use strips of Mirafi geogrid that have been **factory cut** and are **certified** for width and strength by TenCate Mirafi.

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:	JRJ	TITLE: Typical Reinforced Wall Section	REDI-ROCK® 05481 US 31 SOUTH, CHARLEVOIX, MI 49720 (866) 222-8400 ext 3010 • engineering@redi-rock.com www.redi-rock.com
APPROVED BY:	JRJ		
DATE:	17MAR2016		
SHEET:	1 of 1	FILE: 2 Typical Gravity Wall Section 031716.dwg	