



LEGEND


- RETAINING PALLET A BLOCKS
- RETAINING PALLET B BLOCKS
- RETAINING PALLET C BLOCKS
- FREESTANDING PALLET D BLOCKS
- FREESTANDING PALLET E BLOCKS

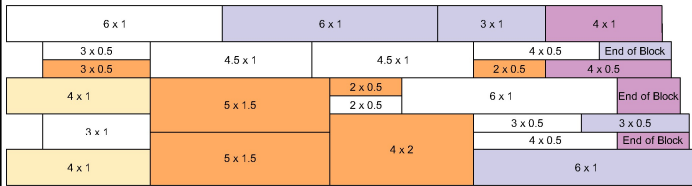

90° FREESTANDING
OUTSIDE CORNER

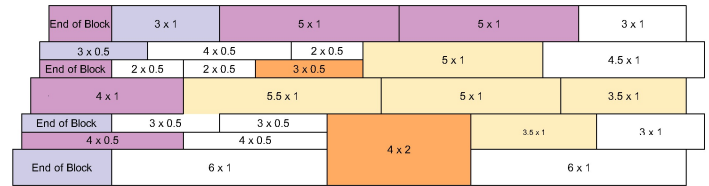

PROFILE VIEW

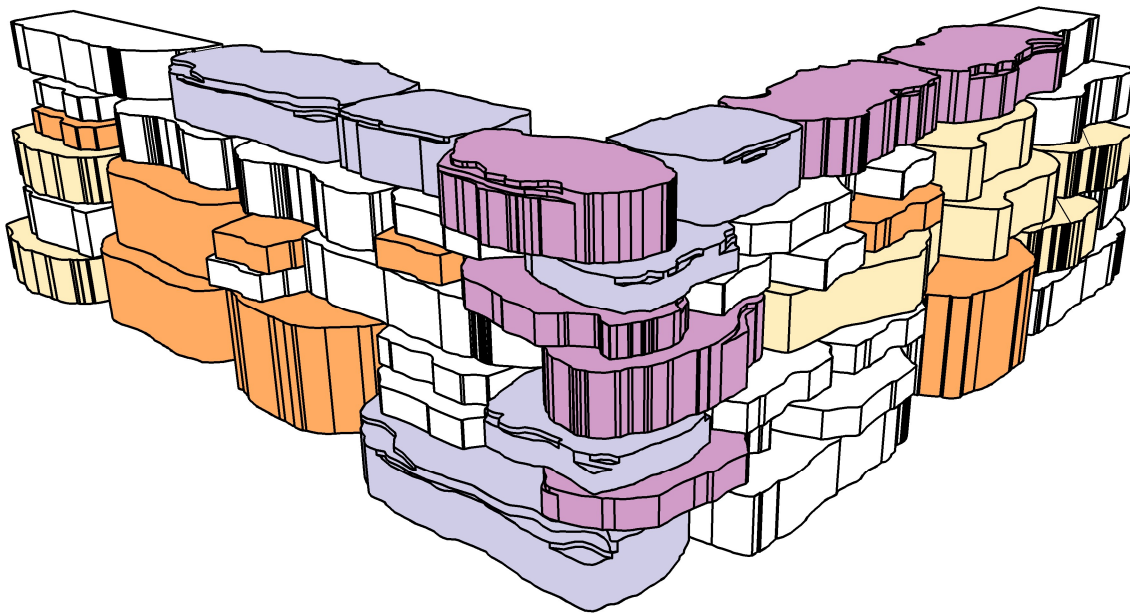

ISOMETRIC VIEW

NOTES:

- USE FREESTANDING BLOCKS BEGINNING WITH 12 in (152 mm) BLOCK AND STACK TWO 6 in BLOCKS ON TOP OF 12 in (152 mm) IN PATTERN SHOWN TO CREATE A 90° OUTSIDE CORNER. FREESTANDING BLOCKS ARE INTENDED TO BE SET BACK 3 in (76 mm) IN BOTH DIRECTIONS TO ACCOUNT FOR WALL BATTER IN EACH DIRECTION.
- INSTALL FREESTANDING PALLET BLOCKS WITH ALTERNATING FACES TO CREATE A MORE RANDOM LOOK.
- TRIM SMALL PARTS OF THE FREESTANDING BLOCKS NEAR THE BACK OF THE WALL TO AVOID INTERFERENCE WITH THE SHEAR HEELS OF ADJACENT BLOCKS.
- THIS DETAIL SHOWS A 90° OUTSIDE CORNER COMPOSED OF (2) A PALLETS, (4) B PALLETS, (2) C PALLETS, (2) D PALLET FREESTANDING BLOCKS AND (2) E PALLET FREESTANDING BLOCKS.
- BLOCK CONFIGURATION SHOWN RESULTS IN (1) 5.5 X 1, (1) 4.5 X 1, AND (1) 3 X 1 BLOCK NOT BEING USED.
- BLOCK SIZES AND PLACEMENT SHOWN ARE FOR REFERENCE ONLY. INDIVIDUAL BLOCKS WILL VARY WITH INSTALLATION PATTERN.
- THIS DRAWING IS FOR REFERENCE ONLY. DETERMINATION OF THE SUITABILITY AND/OR MANNER OF USE OF ANY DETAILS CONTAINED IN THIS DOCUMENT IS THE SOLE RESPONSIBILITY OF THE DESIGN ENGINEER OF RECORD. FINAL PROJECT DESIGNS, INCLUDING ALL CONSTRUCTION DETAILS, INTERNAL AND EXTERNAL STABILITY, AND DRAINAGE, SHALL BE PREPARED BY A LICENSED PROFESSIONAL ENGINEER USING THE ACTUAL CONDITIONS OF THE PROPOSED SITE.

90° OUTSIDE CORNER WITH FREESTANDING BLOCKS

(NO SCALE)

DRAWN BY: RPG APPROVED BY: LBH DATE: 15-OCT-2025 SHEET NO.: 1 of 1	TITLE: 90° OUTSIDE CORNER WITH FREESTANDING BLOCKS DETAIL DRAWING FILE: 90_Outside_Corner_With_Freestanding_Blocks.dwg	 8212 M-119 HARBOR SPRINGS, MI 49740 877-777-6558 • www.rosettahardscapes.com
---	--	--