


TYPICAL STEP INSTALLATION

NOT TO SCALE

TREAD WIDTH VARIES (12 in (305 mm)
OR MORE IS DESIRABLE)

SLOPE 1-2% TO ALLOW FOR
PROPER DRAINAGE

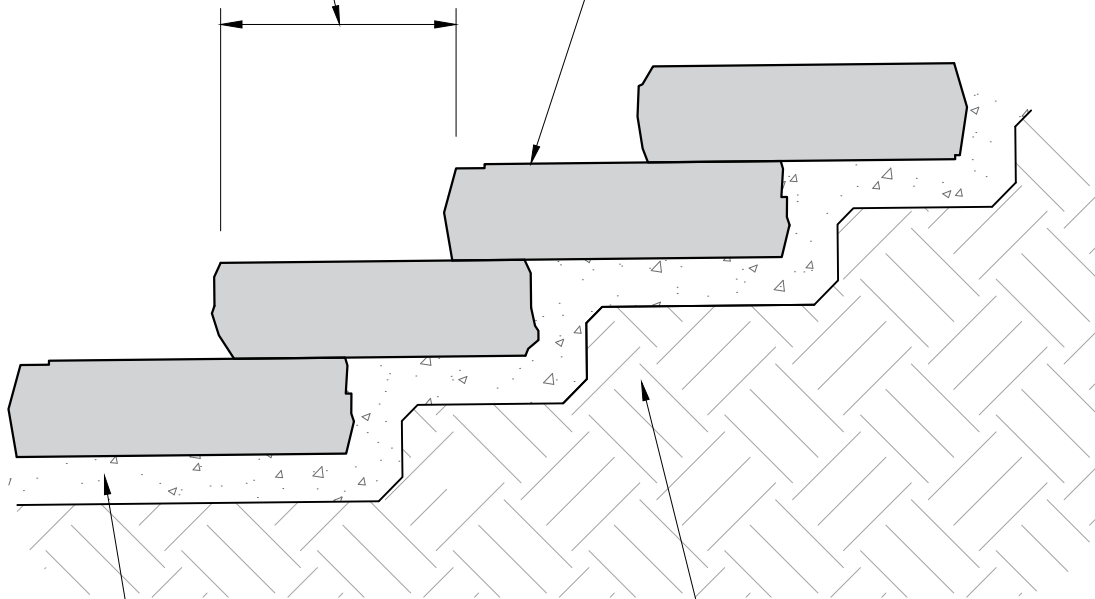

FREE-DRAINING GRANULAR MATERIAL
(3 in (76 mm)) THICK, COMPACT TO A
MINIMUM OF 95% MAXIMUM DRY DENSITY

COMPACT SUBBASE MATERIAL TO A
MINIMUM OF 95% MAXIMUM DRY DENSITY
(OR AS SPECIFIED BY ENGINEER)

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, internal and external stability, and drainage, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:
D. CERMINARO

APPROVED BY:
L. RECHTIN

DATE:
23-JUN-2026

SHEET NO.:
1 of 1

TITLE:

TYPICAL STEP INSTALLATION DETAIL

DRAWING FILE:
Typical_Step_Installation_23JUN2026.dwg

ROSETTA
HARDSCAPES, LLC

8212 M-119 HARBOR SPRINGS, MI 49740
844-367-9763 • www.rosettahardscapes.com